


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 28 TOWNSHIP 16 RANGE 2  
DATE: 10-20-08  
PARTY CHIEF: Wilcoxen  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Survey mark nail  
METHOD OF ESTABLISHMENT: County: 5-25-00

IN. S.P.C. E ZONE NAD '83  
NAME: 16022817  
N: 505597.4940(m)  
E: 43870.6330(m)

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

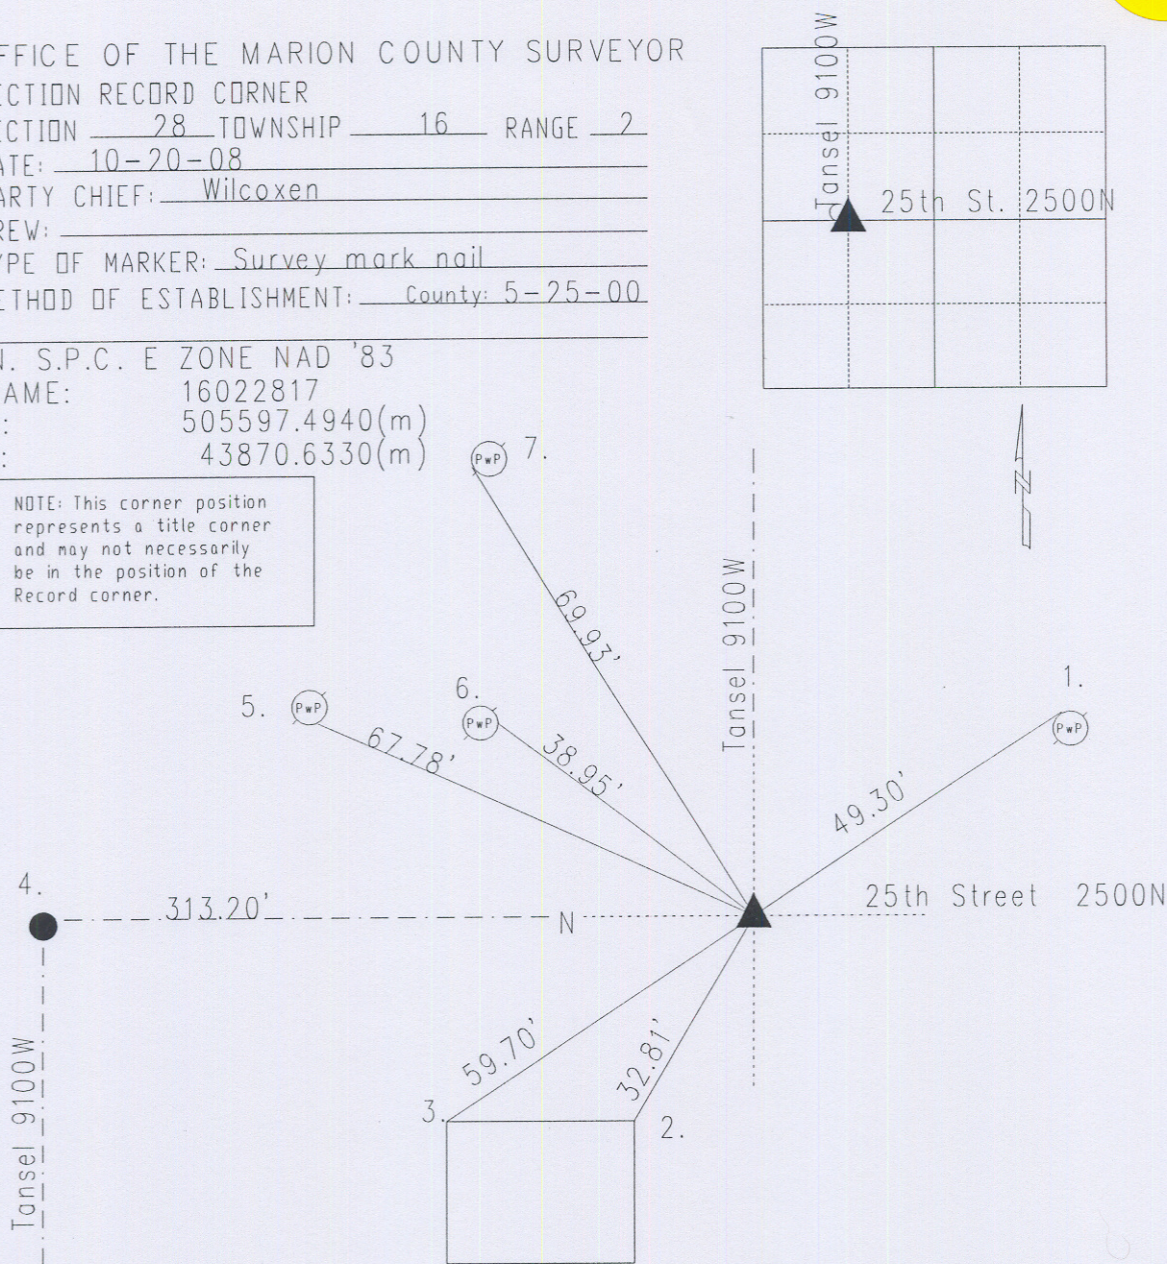

Corner History: Stone set 4-22-1885 by Hosbrook per Wayne Township Legal Surveyo Book pg. 16. Stone down 6" 11-13-1944. Stone found 10" down 11-7-1974. Re-tied 10-20-08 by Wilcoxen.

16022817

REF.	DISTANCE	DESCRIPTION
1.	49.30'	PK nail N PwP#7-421WB
2.	32.81'	NF wooden barn
3.	59.70'	NW "
4.	313.20'	Due W to C/L of Tansel Road 9100W (stone with cut 'x' found)
5.	67.78'	PK nail SW PwP no#
6.	38.95'	PK nail NF PwP#72-421WB 12"up
7.	69.93'	PK nail W PwP#6-421WA 12"up